
LOUNGE II S9328/150TC - 9W

9 watt decorative IP54 architectural LED wall mount luminaire, with selectable CCT

Application

A decorative architectural solution for residential, commercial interior or exterior spaces



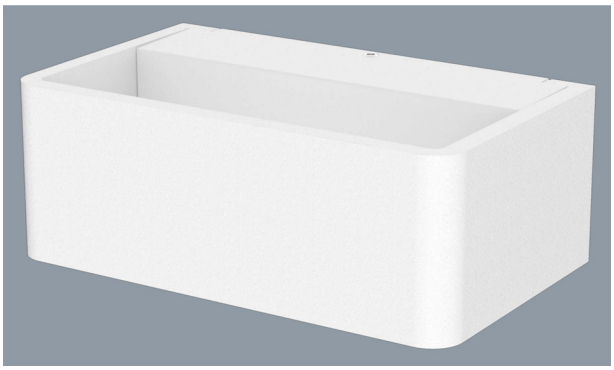

Design Specifications

- Convenient TC selectable colour temperature, 3000K / 4000K / 5000K
- Durable white or black powder coated finish
- Integral non-dimmable control gear 9 watt
- Robust die-cast aluminium body profile
- High efficiency SMD LED
- Indirect illumination (up and down) optical performance

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Dim (mm)
S9328/150TC/WH	240	9	500/600/550	3000/4000/5000	80	150(L) x 90(W) x 55(H)
S9328/150TC/BK	240	9	500/600/550	3000/4000/5000	80	150(L) x 90(W) x 55(H)


Model No.	Body Colour
S9328/150TC/WH	WHITE
S9328/150TC/BK	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

NSW/ACT: 02 9723 3099
QLD: 07 3879 5999
VIC/TAS/SA/NT: 03 9532 3168
WA: 08 9248 7458
www.sal.net.au

PDF Prepared: 29.9.2021 1:31pm
Last page update: Sep 2021
© Copyright SAL - All Rights Reserved


Dimensions

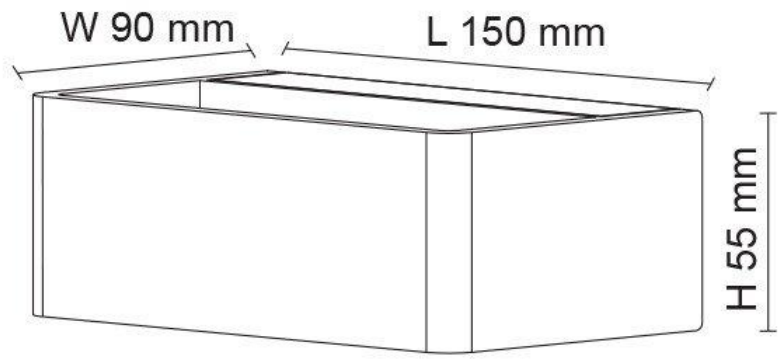

Photometric Data

Unit: cd C0/C180 C90/C270

S9328/150TC at 3000K



© Copyright SAL - All Rights Reserved